


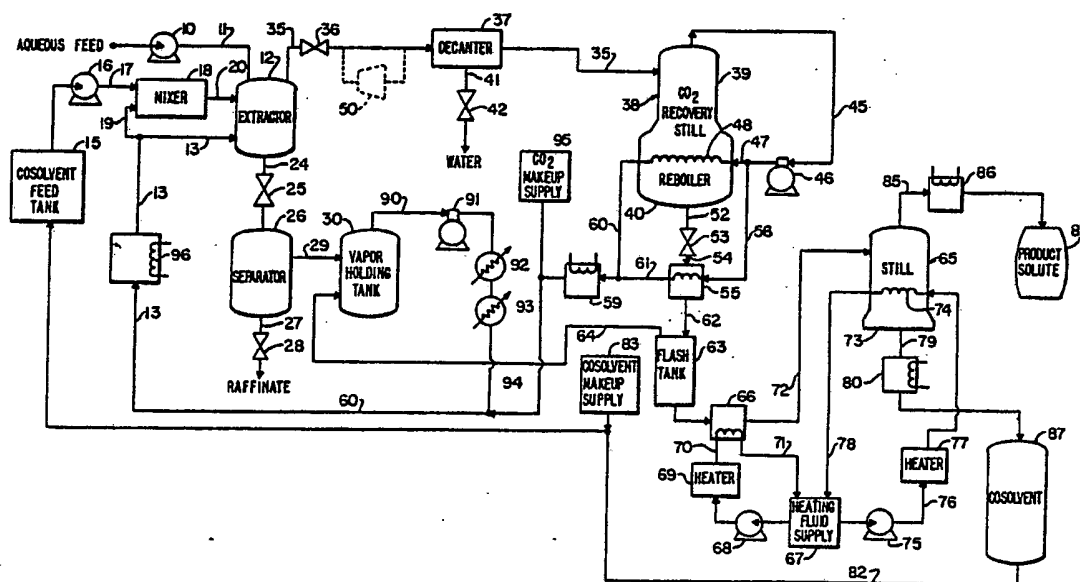

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification³ : B01D 11/04	A1	(11) International Publication Number: WO 85/ 04816 (43) International Publication Date: 7 November 1985 (07.11.85)
(21) International Application Number: PCT/US85/00671 (22) International Filing Date: 16 April 1985 (16.04.85) (31) Priority Application Number: 603,563 (32) Priority Date: 25 April 1984 (25.04.84) (33) Priority Country: US (71) Applicant: CRITICAL FLUID SYSTEMS, INC. [US/US]; 25 Acorn Park, Cambridge, MA 02140 (US). (72) Inventor: MOSES, John, M. ; 105 Vincent Road, Dedham, MA 02026 (US). (74) Agent: SCHILLER, Robert, J.; 60 Hickory Drive, Waltham, MA 02154 (US).		(81) Designated States: BE (European patent), BR, DE (European patent), FR (European patent), GB (European patent), IT (European patent), JP, NL (European patent), SE (European patent). Published <i>With international search report.</i>

(54) Title: LIQUID CO₂/COSOLVENT EXTRACTION**(57) Abstract**

A fluid extractant, and a process and apparatus for using the extractant to separate an organic liquid from an aqueous mixture. The extractant comprises a first fluid solvent which is a gas in its near-critical or supercritical state and a cosolvent. A preferred first fluid solvent is near-critical liquid carbon dioxide. Preferred cosolvents are 2-ethyl hexanol for ethanol extraction, and hexanoic acid for acetic acid extraction. Organic compounds such as monohydric alcohols, monoacids, ketones, ethers, aldehydes and esters can be recovered from dilute aqueous solutions more economically than possible by prior art processes of distillation.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GA	Gabon	MR	Mauritania
AU	Australia	GB	United Kingdom	MW	Malawi
BB	Barbados	HU	Hungary	NL	Netherlands
BE	Belgium	IT	Italy	NO	Norway
BG	Bulgaria	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali		
FR	France				

- 1 -

LIQUID CO₂/COSOLVENT EXTRACTION

This invention relates to a process and apparatus for solvent extraction and more particularly to a process and apparatus for extracting large volumes of liquid organics from their aqueous solutions.

5 In a number of commercial processes used for manufacturing many of the high-volume, liquid organic compounds (such as oxygenated hydrocarbons, organic sulfur compounds, organic nitrogen compounds, halogenated hydrocarbons, organo-metallic compounds, and the
10 like) it is necessary to separate the organic compounds from aqueous solutions. In many of these mixtures, water constitutes a major portion of the solution. The separation of these organic compounds from water may require relatively large and complex
15 distillation equipment and demands a heavy expenditure of energy, if only to boil off the water. In a large number of these cases the water and organic liquids form azeotropes, often necessitating higher energy costs to even partially break the azeotrope.

20 At present, about 3% of the total national energy consumption in the United States is used for distillation in petroleum refining and chemical processing. It is therefore clear that a process and/or apparatus which materially decreases the energy requirements for
25 separating even a portion of such solutes from their solutions, would provide a highly desirable savings in energy.

- 2 -

It is therefore a primary object of this invention to provide an improved fluid extractant for extracting an organic solute from its aqueous solution. A further object is to provide a fluid
5 extractant of the character described which minimizes the amount of fluid extractant which must be cycled, and reduces capital equipment and operating costs. Yet another object is to provide such a fluid extractant which is particularly suitable for separating
10 from very dilute aqueous solutions, chemicals such as lower alcohols and acids which are not readily extracted with a single solvent.

Another primary object of this invention is to provide an improved process for extracting liquid
15 organic compounds and the like from admixtures with water. An additional object is to provide such a process which makes it possible to employ distillation equipment having fewer stages in smaller and less complex distillation equipment than now used. Yet a
20 further object is provide a process for extracting such organic solutes from their solvents using liquid carbon dioxide (i.e. near critical or super critical) as an extractant component, thereby
25 taking advantage of many of the unique properties of this particular extractant including favorable diffusion coefficients, low viscosity and low heat of vaporization. A still further object of this

- 3 -

invention is to provide such a process which uses as one component of a fluid extractant, a non-polluting, nontoxic and relatively inexpensive fluid, i.e. carbon dioxide.

5 Yet another primary object of this invention is to provide improved apparatus for extracting organic liquid solutes from their solutions, the improvement lying in a combination of apparatus components. An additional object is to provide apparatus of the
10 character described which makes possible the use of a fluid solvent with resulting savings in energy requirements and capital equipment costs.

According to one aspect of this invention there is provided a fluid extractant for extracting an oxygenated hydrocarbon solute from an aqueous solution, the extractant comprising a mixture of liquid carbon
15 dioxide and a cosolvent. The latter preferably has inter alia, the following attributes: it is a liquid at the temperature and pressure of the extraction process, is substantially a better solvent for the hydrocarbon solute than for water under the extraction
20 conditions; has a boiling point substantially different than that of the solute, is soluble in the liquid carbon dioxide to form a single-phase liquid under extraction conditions, and is essentially chemi-
25 cally unreactive with either the aqueous solution or the carbon dioxide at process conditions.

- 4 -

According to another aspect of this invention, there is provided a process for separating an organic liquid solute from an aqueous liquid mixture characterized by the steps of contacting at an elevated pressure the liquid mixture with a fluid extractant comprising a first solvent fluid and a cosolvent of the type described, thereby to form two phases, the first phase comprising an extract of the solute in the fluid extractant and the second phase comprising water with residual cosolvent, solute and first solvent; contacting the second phase with additional first solvent fluid to remove the residual cosolvent therefrom and transfer it to said first phase; and separating the first and second phases. The first solvent fluid is a gas under ambient conditions of temperature and pressure which is used in its liquid near-critical or supercritical state. A preferable first solvent fluid is liquid carbon dioxide e.g. carbon dioxide below its critical temperature and at a pressure sufficiently high to maintain it as a liquid solvent.

According to yet another aspect of this invention, there is provided an apparatus for separating an organic liquid solute from an organic liquid solute/water combination, the apparatus comprising pressure vessel means for effecting countercurrent contact between (1) the combination of an organic

- 5 -

liquid solute and water, and (2) a pressurized extractant comprising a mixture of a pressurized first fluid and a cosolvent of the type described. Because the latter mixture is a solvent for the organic liquid
5 solute but substantially less for water, the apparatus produces a fluid extract of the organic liquid in the extractant fluid and a raffinate comprising water with minor amounts of the first solvent and organic liquid solute. The apparatus also comprises mixer means for
10 mixing the first fluid and the liquid cosolvent to form the extractant fluid; means for introducing the extractant fluid into the pressure vessel means at a predetermined level; means for introducing additional first fluid below the predetermined level; first
15 distillation vessel for separating a still feed into an overhead vapor and first liquid bottoms and having associated therewith reboiler means including heat exchange means for circulating a heat transfer fluid therethrough in indirect heat exchange relationship
20 with the first liquid bottoms; first pressure line means connected for conveying the fluid extract as a still feed from the pressure vessel means to the first distillation vessel means; vapor compressor means; second pressure line means incorporating the vapor
25 compressor means and connected for conveying the overhead vapor to the vapor compressor means and recompressed vapor therefrom through the heat exchange

- 6 -

means; third pressure line means for recycling the condensed vapor or supercritical fluid from the heat exchange means to the mixer means and to the means for introducing pressurized first fluid below the predetermined level; still bottom pressure reducing means; flash tank means; fourth pressure line means incorporating the still bottom pressure reducing means and connected for conveying the still bottoms from the reboiler means to the flash tank means through the still bottom pressure reducing means to provide a mixture of the liquid solute and cosolvent; second distillation vessel means connected for separating the liquid solute into product and the cosolvent by distillation; liquid line means incorporating heating means connected for conveying the mixture of the liquid solute and the cosolvent from the flash tank means to the second distillation vessel means; and means for returning the cosolvent from the second distillation vessel means to the mixer means. In a preferred embodiment of the apparatus, vapor recompression means are used in connection with the first distillation vessel to provide the heat required to heat the still bottoms therein.

Other objects of the invention will in part be obvious and will in part be apparent hereinafter.

The invention accordingly comprises the apparatus possessing the construction, combination of elements

- 7 -

and arrangement of parts, the process involving the several steps and relation of one or more of such steps with respect to each of the others, and the composition of matter having the particular characteristics, all of which are exemplified in the following detailed disclosure and the scope of the application of which will be indicated in the claims.

For a fuller understanding of the nature and objects of the invention, reference should be had to the following detailed description taken in connection with the accompanying drawings in which:

Fig. 1 is a flow chart of the process of the present invention using liquid carbon dioxide with a cosolvent as the extractant fluid;

Fig. 2 is a block diagram of an exemplary apparatus incorporating the principles of the present invention;

Fig. 3 is a plot of an exemplary recompression cycle for carbon dioxide on a fragment of a temperature-entropy diagram for carbon dioxide;

Fig. 4 is a plot showing the relation between the effectiveness of liquid solute (ethanol) removal from a water mixture and the amount of cosolvent used in the process of the present invention; and

Fig. 5 is a plot showing the relation between the calculated distribution coefficient for a given selectivity value for an ethanol/water mixture and the

- 8 -

amount of cosolvent used.

5 In the prior art, the removal of highly polar organic compounds, such as the lower alcohols, acids, ethers, aldehydes, ketones, ester and the like, from aqueous streams is often accomplished by steam stripping and fractional distillation. This prior art process requires costly capital equipment and is highly energy intensive. In some cases liquid-liquid solvent extraction may be used for concentrating some feeds. For example, the C₄ to C₁₀ esters, ethers and ketones can be used as solvents to extract acetic acid from water; but these solvents have poor selectivities and low equilibrium distribution coefficients, resulting in large solvent circulation rates, excessive equipment size and high energy costs. Moreover, such conventional liquid solvents have high mutual solubilities with water, thus requiring further drying to remove substantial amounts of water.

15 Recently new processes have been described for recovering acetic acid from feed streams below five weight percent acetic acid. (See for example Ricker, N.L., Pittman, E.F., and King, C.J., "Solvent Properties of Organic Bases for Extraction of Acetic Acid From Dilute Aqueous Industrial Streams," J. Separ. Proc. Technol., 1 (2) 23-30 (1980).) These processes involve using organic Lewis bases such as alkylamines and phosphine oxides as cosolvent extrac-

- 9 -

tants to increase the distribution coefficients. Such processes, however, still require the distillation separation of solvent systems with high-boiling points.

5 It has been known for some time that many compounds which are gases at ambient temperature and pressure can be converted to supercritical fluids by subjecting them to conditions such that they are at or above their critical pressures and temperatures. At pressures and/or temperatures somewhat below the critical points, most of these gases may be liquefied to
10 attain what is termed their near-critical state. These gases in either their near-critical liquid or supercritical fluid state become good solvents for many organic materials. It is therefore possible to
15 refer to them as being in a solvent condition, the actual temperature and pressure for any one fluid in its solvent condition being readily determinable for the solute to be separated and recovered.

20 Among those gases which may be converted to the solvent-condition fluid state are alkane and alkene hydrocarbons such as ethane, propane, butane, ethylene, and propylene; halogenated hydrocarbons such as the halomethanes and haloethanes; and inorganics such as carbon dioxide, ammonia, sulfur dioxide and nitrous
25 oxide. Suitable mixtures of these gases may also be used.

Of these gases which may be in the solvent con-

- 10 -

dition, carbon dioxide, ethylene and ethane may be used as illustrative of the temperatures and pressures required. These gases are of particular interest because they fall within the near-critical and
5 supercritical regimes at essentially ambient temperature and have critical pressures in the range of 50 to 75 atmospheres -- pressures which are readily handled by existing equipment components. The critical temperature and pressure for each of these gases
10 are well known and, as noted, the solvent condition temperature and pressure ranges can readily be determined. For example, carbon dioxide has a critical temperature of 31.1°C and its solvent condition temperature may range between about -40°C and about 150°C.
15 The critical pressure of carbon dioxide is 72.8 atmospheres and its solvent condition pressure may range between about 30 and 150 atmospheres, or higher.

Carbon dioxide in its solvent condition is a preferred first solvent in admixture with a cosolvent in
20 the practice of this invention, for it possesses a unique combination of properties. In addition to its good solvent properties under the conditions used, liquid carbon dioxide in its near-critical state has distinctly favorable diffusion coefficients compared
25 to normal liquids, a property which gives rise to high mass-transfer coefficients. This in turn offers the possibility of minimizing or even effectively elimi-

- 11 -

5 nating significant transport resistance in the carbon dioxide phase resulting in an increase in the overall extraction rate. It also thereby offers the possibility of decreasing the size and more effectively optimizing the design of the contacting columns used.

10 A second favorable property of solvent-condition carbon dioxide is its low viscosity which is about a factor of ten less than that of conventional liquid solvents. Since viscosity enters into the flooding characteristics of an extraction column, high flooding velocities and thus higher flow capacities can be achieved with a concomitant reduction in contacting column diameter and capital expenditure costs.

15 The high volatility of carbon dioxide relative to many of the organic liquids produced and used in high volume (e.g. ethanol, acetic acid, methyl ethyl ketone, and the like) and which are generally extracted from a water mixture, permits a distillation column in the present invention to operate as an evaporator with a short stripping section using fewer stages. The heat of vaporization of the solvent-condition liquid carbon dioxide is very low, being about one-fifth of that of many normal liquid solvents and about one-thirteenth that of water. A low mutual solubility of carbon dioxide in water keeps losses in the raffinate low and therefore can obviate the need for a raffinate-stripping column.

20

25

- 12 -

Finally, carbon dioxide is inexpensive, non-polluting and nontoxic, requiring no special equipment or procedures for storage and handling beyond normal practice for pressure systems.

5 The ability of carbon dioxide in its near-critical state and in its supercritical state to serve as an extracting solvent has been known for a number of years. (See for example Francis, A.W., J. Phys. Chem. 58, 1099 (1954) and Ind. Eng. Chem. 47, 230
10 (1955).) Near-critical and supercritical fluids, including carbon dioxide, have been suggested as solvents for a wide range of materials including various oils (U.S. Patents 1,805,751, 2,130,147, 2,281,865); flavor components (U.S. Patent 3,477,856);
15 cafein in coffee (U.S. Patent 3,843,832); cocoa butter from a cocoa mass (U.S. Patent 3,923,847); fats from grains and the like (U.S. Patent 3,939,281); residual hexane from de-fatted grain (U.S. Patent 3,966,981); and a variety of materials such as paraf-
20 fins, glycerol, oils and fats from a variety of compositions (U.S. Patent 3,969,196). A very detailed review of the general field of extraction with supercritical gases is to be found in Angewandte Chemie
-- International Edition in English, 17: 10, pp
25 701-784 (October 1978). Of particular interest is the flow sheet of a pilot plant for continuous "detraction" of petroleum top-residues with propane

- 13 -

appearing as Fig. 5 on page 707 of the Angewandte Chemie reference.

5 It must be recognized that the removal of a polar organic solute from an aqueous solution by solvation is a complex and unpredictable phenomenon. For example, it has long been believed that when using a non-polar solvent to remove a polar organic solute from water (i.e. the system, solvent/water/solute) the addition of a cosolvent, more polar than the original
10 solvent, (i.e. providing the system solvent/cosolvent/water/solute) should improve the solubility of the solute in the solvent mixture. As will be seen later herein, this general rule does not apply where liquid CO₂ is used as the solvent to remove the organic
15 solute from aqueous solution.

In U.S. Patents 4,375,387 and 4,349,415, there are described systems for extracting organic liquids from their aqueous solution by contacting the solution with an extractant fluid under conditions of tem-
20 perature and pressure to render the extractant fluid a solvent for the organic liquid solute but substantially less for the solvent, thereby forming a fluid extract of the organic liquid solute in the extractant fluid and a raffinate comprising the solvent with
25 minor amounts of the extractant fluid and organic liquid solute. The extractant fluid is further characterized as being a gas at ordinary ambient con-

- 14 -

ditions of temperature and pressure. The fluid
extract of the solute is used to provide a still feed
for a further distillation step. The energy required
to effect distillation is provided by compression of
5 the overhead still vapors to heat the latter and
indirectly heat the still feed. A preferred extrac-
tant used in this system is solvent-condition carbon
dioxide fluid at a pressure between about 30 and about
150 atmospheres and a temperature between about 0° and
10 150°C. The basic energy-saving principle of these
patents is employed in the present invention for the
mixed solvent process.

Although the use of such extractant fluids as
carbon dioxide, propane, ethylene and ethane
15 (maintained under the specified conditions of tem-
perature and pressure) have been found to be effective
in separating oxygenated hydrocarbons from their
aqueous solutions, some of the liquid organic solutes
such as ethyl alcohol, acetic acid and the like exhi-
20 bit low distribution coefficients and hence require
circulating very large quantities of the liquid
extractant.

Supercritical carbon dioxide and propane, along
with acetone as an entrainer, have been used to
25 separate mono and diglycerides. The acetone entrainer
increased the solubility of the glycerides, altered
their relative volatilities and facilitated subsequent

- 15 -

product-solvent separation. (See Peter, Siegfried and Brunner, Gerd, Angew. Chem. Int. Ed. Engl. 746: 46-50 (1978).) Cosolvents to enhance the solubility and selectivity of materials in the solvent phase of a
5 supercritical carbon dioxide extraction have been proposed in the literature. Zosel (U.S. Patent 3,806,619) discloses the use of water-saturated carbon dioxide to selectively extract caffeine from coffee; and Wheldon et al (U.S. Patent 4,278,012) mention the
10 use of ethanol to improve hops extraction with carbon dioxide.

Shimshick in U.S. Patent 4,250,331 discloses a process for recovering carboxylic acids from dilute aqueous solutions of alkali metal salts of the car-
15 boxylic acids by mixing the solutions with a supercritical solution containing carbon dioxide with or without a cosolvent. Shimshick claims that the carbon dioxide reacts with the salt to form the carboxylic acid which in turn dissolves in the supercritical
20 fluid. While Shimshick (and Francis in U.S. Patent 4,250,331) recognizes that the use of a cosolvent with fluid CO₂ may enhance the solvent separation process, Shimshick teaches that the added cosolvent must be a supercritical gas having a T_c of less than 130°C, and
25 should be more polar than CO₂ and thus have a net dipole moment. However, the only cosolvent gases disclosed by Shimshick are dimethyl ether and a number

- 16 -

of halogenated hydrocarbons such as the Freons. Francis, on the other hand, discloses a large selection of liquid cosolvents, but is concerned only with extraction from a hydrocarbon mixture, not an aqueous solution.

5 In the separation of liquid-liquid systems such as aqueous solutions of ethanol, acetic acid, ketones, esters, ethers and the like, using a fluid extractant such as carbon dioxide, it is desirable to be able to
10 maximize the distribution coefficient (D.C.) with respect to the solute, and the selectivity () for the system. The distribution coefficient indicates the ratio of CO₂ to aqueous feed needed for a specified separation, and it is defined, for a particular solute
15 as:

$$\text{D.C.} = \frac{(\text{wgt. fraction of solute in CO}_2 \text{ phase})}{(\text{CO}_2\text{-free, wgt. fraction of solute in H}_2\text{O phase})}$$

20 The selectivity (β) is a measure of the solute-to-water ratio in the extractant fluid, and it is defined as:

$$\beta = \frac{(\text{weight ratio solute to water in CO}_2 \text{ phase})}{(\text{weight ratio solute to water in H}_2\text{O phase})}$$

25

In the practice of the present invention, a cosolvent for the solute is added to a first solvent

- 17 -

fluid (e.g. liquid carbon dioxide), to increase D.C. and β so that the amount of extractant which must be cycled is less, and the size of apparatus components required are smaller than that required for the extractant alone.

Although supercritical carbon dioxide may be used as the extractant fluid, it is substantially as effective in the practice of this invention to use the carbon dioxide in its liquid state, and preferable to use it at approximately ambient temperature or lower and at pressures sufficiently near or above its critical pressure of 72.8 atmospheres to maintain the liquid in the desired solvent state. A preferred pressure range is between about 60 and 85 atmospheres. Typical combinations of extraction temperatures and pressures are illustrated in the following Examples. For convenience of further description of the invention, this first or primary solvent fluid will hereinafter be referred to as liquid carbon dioxide. It is, however, to be understood that gases such as propane, ethane, ethylene and the like may be used.

The preferred cosolvent used with the liquid carbon dioxide to form the extractant fluid of this invention is characterized as follows: it is a liquid at about 60°C and standard pressure; it is an oxygenated, monofunctionally substituted hydrocarbon (i.e. has one radical substituted thereon to impart

- 18 -

hydrogen-bonding and polar components substantially lacking in such primary solvents as carbon dioxide); the cosolvent should have an affinity for and be a solvent for the organic liquid solute in normal liquid-liquid extraction systems, i.e. the cosolvent should be a substantially better solvent for the liquid solute than for the water where an aqueous solution is to be separated; the cosolvent should have a solubility in CO₂ greater than 1 weight percent so that under the conditions of extraction and separation, the carbon dioxide/cosolvent mixture forms a single phase; the cosolvent should have a distribution coefficient (CO₂/water) in the absence of solute, of greater than 3 on a weight basis; the cosolvent should have a boiling point substantially above or below that of the liquid solute at atmospheric pressure, to facilitate a final distillation separation of organic liquid solute from cosolvent. Finally, the cosolvent should be substantially chemically unreactive under process conditions with the first solvent fluid, the liquid solute and water.

Typically, for example, monofunctional alcohols having less than six carbon atoms in the molecule, exhibit distribution coefficients (CO₂/H₂O) of considerably less than 3 on a weight basis so are considered unsuitable as cosolvents in the present invention.

- 19 -

The cosolvent is used in an amount sufficient to effect an appreciable increase in the distribution coefficient over that achieved by carbon dioxide alone for a given selectivity (β) of the extraction system being used. Generally, the amount of cosolvent added to the extraction fluid will not be greater than about 30 weight percent or less than 1 weight percent of the first solvent fluid, e.g. carbon dioxide, used. Examples of suitable cosolvents are alcohols such as n-amyl alcohol, 2-ethyl hexanol, n-butanol, hexanol, ethyl hexanediol, t-amyl alcohol, dodecyl alcohol, decyl alcohol; acids such as hexanoic acid, octanoic acid, pentanoic acid, heptanoic acid; amines such as trioctylamine and isopropylamine; aldehydes such as furfural; phosphine oxides such as trioctylphosphine oxide; and mixtures thereof.

The mixture of first solvent fluid (e.g. liquid carbon dioxide) and cosolvent is used to extract the liquid solute from the water. Unless otherwise specified, the term "extractant fluid" is used hereinafter to designate the novel combination of fluids, of this invention, i.e., liquid carbon dioxide as representative of the first solvent fluid, and any of the above-identified cosolvents.

The use of cosolvents with liquid CO₂ has been described in Francis (U.S. Patent 2,631,966) to fractionate mixtures of lubricating oils. The use of liquid CO₂ for extraction purposes is also described in U.S. Patents 2,034,495 and 2,346,639 (liquid CO₂ as cosolvent with SO₂ as primary solvent); U.S. Patent

- 20 -

2,246,227 (acetone as cosolvent); U.S. Patents
2,281,865 and 2,631,966 (other cosolvents).

5 The use of extractant fluids according to the
process of this invention is applicable to the extrac-
tion of a wide range of organic liquid solutes from
their aqueous solutions, as long as the water of the
solution is relatively immiscible with the extractant
fluid under the conditions of temperature and pressure
employed. Such organic liquid solutes include water-
10 miscible oxygenated hydrocarbons including the alipha-
tic alcohols such as ethanol, isopropanol and the
like; the polyhydric alcohols; as well as acids, alde-
hydes, esters and ketones, and the materials earlier
listed herein.

15 The steps of the process of this invention are
detailed in the flow chart of Fig. 1; and the basic
apparatus is diagrammed in Fig. 2. Reference should
be had to these drawings in the following detailed
description.

20 For purposes of illustration, an aqueous solution
of ethanol will be considered as the feed; and liquid
carbon dioxide as the primary solvent with 2-ethyl
hexanol as a cosolvent will be considered as the
extractant fluid. Fig. 4 illustrates how vapor
25 recompression may be used in separating extract from
the carbon dioxide; and Figs. 5 and 6 illustrate the
improved performance attained with the addition of a

- 21 -

cosolvent to the extractant fluid through the use of the process and apparatus of this invention.

Referring to Fig. 2, a feed mixture, for example ethanol/water, is pressurized and pumped by pump 10 through suitable pressure line 11 into extractor 12 designed to provide for the countercurrent contacting of the aqueous feed mixture and the fluid extractant. Extractor 12 may be any suitable pressure vessel designed to provide efficient liquid-liquid contact, such as by countercurrent flow in a packed or sieve-plate tower. Liquid carbon dioxide from pressure line 13 is introduced into the bottom of extractor 12. The cosolvent is provided from cosolvent feed tank 15 and pumped by pump 16 through line 17 into mixer 18 where the cosolvent is mixed with carbon dioxide fed from line 13 through branch line 19 into mixer 18. Mixer 18 is typically an in-line or static fluid mixer. The cosolvent/carbon dioxide extractant fluid mixture is fed through line 20 into extractor 12 at a level which insures that essentially all of the ethanol in the feed mixture introduced into extractor 12 has been extracted from the water by the extractant. That portion of additional liquid carbon dioxide which is introduced through line 13 into the bottom of extractor 12 serves to extract cosolvent from what may be termed a preliminary raffinate i.e. the mixture formed in extractor 12 of water and any residual cosolvent. After

- 22 -

such extraction, the preliminary raffinate is then discharged from extractor 12 as essentially cosolvent-free final raffinate. In a preferred embodiment of the practice of this invention, the fluid in extractor
5 is maintained at essentially room temperature at a pressure between about 60 and about 85 atmospheres.

The final liquid raffinate, comprised of water, some residual carbon dioxide and a very small residual amount of ethanol and cosolvent, is withdrawn from
10 extractor 12 through line 24 and a pressure-reducing valve 25 into separator 26. The resulting decompressed raffinate is a two-phase mixture of liquid water, with a small amount of dissolved carbon dioxide as well as the residual ethanol, and carbon dioxide vapor. The
15 water phase is withdrawn through line 27 and pressure-reducing valve 28 to become the raffinate discharge. The carbon dioxide forming the vapor phase is transferred as raffinate vapor flash, at a pressure intermediate that in extractor 12 and atmospheric pressure,
20 from separator 26 by line 29 to a vapor holding tank 30 for subsequent reconversion to liquid carbon dioxide. The latter is then introduced into the main stream in line 13.

The liquid carbon dioxide/cosolvent extract containing the dissolved ethanol is withdrawn from
25 extractor 12 under essentially the same conditions as obtained in extractor 12 and transferred by pressure

- 23 -

line 35 to the carbon dioxide recovery still 38. In a preferred embodiment of this invention, particularly in cases where extractor 12 is operated at the lower temperatures, e.g. ambient or lower, some reduction of extract pressure is carried out before the extract is introduced into still 38. This is accomplished in pressure reducing valve 36 associated with high-pressure line 35. In line 35, downstream from pressure reducing valve 36 is a decanter 37 in which small amounts of water in the extract (separated and coalesced in its pressure reduction) is removed and periodically drained off through line 41 controlled by valve 42.

The reduction of pressure, e.g. down to about 50 atmospheres, experienced by the carbon dioxide/cosolvent extract produces a still feed, which is part liquid, part vapor, at a lower temperature, e.g. from about 15 to about 20°C. Distillation column 39 of still 38 is provided with sufficient stages to ensure that essentially all of the ethanol along with the cosolvent collects in the reboiler 40, along with some liquid carbon dioxide, to form the still bottoms.

It will be appreciated that these operational conditions are illustrative and not limiting. For example, the carbon dioxide/cosolvent extract pressure may range from about 15 to about 70 atmospheres prior to its introduction into distillation column 39; and

- 24 -

the resulting still feed may range between about 10 and about 25°C.

5 In keeping with a preferred aspect of this invention, the heat supplied to reboiler 40 is provided through out-of-contact or indirect heat exchange with recompressed carbon dioxide vapor drawn from the overhead of distillation column 39 and sent through line 45, compressor 46, and line 47 into heat exchanger coils 48 in reboiler 40. In an alternative
10 embodiment, reducing valve 36 may be replaced by a turbine 50 (shown in dotted lines), the power output of which may be used to furnish at least a portion of the power required to drive compressor 46 to which turbine 50 is mechanically linked by means not shown.

15 In the apparatus and system illustrated, the recompression of the carbon dioxide vapor from distillation column 39 in compressor 46 makes possible the utilization of the overhead vapor enthalpy as the reboiler heat source. In order to accomplish this, the temperature at which the heat is delivered from the vapor must be raised to provide a driving force for heat transfer to the still bottoms in reboiler 40.
20 This is achieved by vapor compression, so that condensation and enthalpy release will occur at a temperature higher than the boiling point of the reboiler liquid.
25

A typical vapor-recompression cycle is shown on the carbon dioxide temperature-entropy diagram of Fig.

- 25 -

3. In this example, the carbon dioxide leaving the extraction column in admixture with the cosolvent is at point A, here taken to be 25°C and 65 atmospheres which means that the extractant is being used in its near-critical liquid state. Upon expansion into the distillation column, the stream (constituting the still feed) drops in pressure at constant enthalpy to 50 atmospheres. This is point B which in this example represents about 22% vapor and 78% liquid at 15°C. In the reboiler, energy is added and liquid is vaporized to point C, representing all vapor at the same pressure and temperature. Finally, this vapor, passing overhead from the distillation column, is then compressed to point D and, in giving up enthalpy in the reboiler, the stream returns from point D to point A.

In vapor-recompression evaporation or distillation, the elevation in boiling point of the more-volatile component (here carbon dioxide) caused by the presence of the less-volatile component (here the cosolvent and the liquid organic solute) is important. The still overhead leaving the distillation column through line 45 will be at or near the boiling point of the more-volatile component; and the liquid (a solution of the ethanol solute and cosolvent with a minor amount of liquid carbon dioxide) in reboiler 40 will be at a higher temperature, the magnitude of the dif-

- 26 -

ference in temperature depending upon the boiling point elevation due to the presence of the solute and cosolvent.

5 The still overhead from distillation column 39 is compressed adiabatically in compressor 46 to add the enthalpy which must be transferred to the reboiler liquid to partially vaporize it while cooling and condensing the compressed vapor as it passes through heat exchanger 48. Thus the mechanism of vapor-
10 recompression distillation requires that the still overhead must be pressurized by compression to a dew-point temperature high enough above the reboiler liquid temperature to provide an economical temperature difference driving force to effect the
15 necessary heat transfer within reboiler 40. Therefore it follows that the greater the boiling-point elevation due to the presence of the solute and cosolvent, the greater is the compression required and the greater is the excess enthalpy that must be added by
20 the compressor to provide an economical temperature difference driving force for heat transfer. The magnitude of this excess may in some cases cause vapor recompression distillation to be uneconomical. However, it has been found that there exists an unex-
25 pectedly favorable low value for the boiling-point elevation in such carbon dioxide/cosolvent/organic liquid/aqueous solutions as employed in the process of

- 27 -

this invention. It will, of course, be appreciated that such a low boiling-point elevation requires only a moderate increase in still overhead pressure. This means that a comparatively small amount of energy is
5 required to compress the still overhead and hence to separate the solute from the liquid carbon dioxide extract. This, in turn, in part, gives rise to the low-energy characteristics associated with the preferred process of this invention.

10 Following the example used to described the embodiment of Fig. 2, the still overhead vapor sent to compressor 46 is under essentially the same conditions, 50 atmospheres and 15°C which typically prevails in distillation column 39; while the compressed
15 and heated vapor introduced into heat exchanger 48 is at 60 to 85 atmospheres (essentially the extraction pressure) and about 35 to 45°C. As will be described below, a portion of the compressed and heated vapor from compressor 46 may be used to heat the expanded
20 still bottoms from reboiler 40.

Transfer of heat to the liquid in reboiler 40, through heat exchange with the compressed and heated vapors, results in the boiling off of additional carbon dioxide. Because of this very low heat of vaporization, the heat supplied from the recompressed vapor
25 is sufficient to boil off the carbon dioxide, a fact which results in the material reduction in energy

- 28 -

requirements compared, for example, with the heat required in the distillation of a liquid organic/water mixture.

5 The warmed still bottoms made up of product ethanol, cosolvent and a small amount of carbon dioxide are discharged from reboiler 40 through pressure line 52 and pressure-reducing valve 53 from which they emerge at a much reduced pressure, e.g. 3 atmospheres, intermediate between the still pressure and atmospheric and at a low temperature, e.g. -10°C . The decompressed cooled still bottoms are then brought back up to a temperature, e.g. to about 10°C , intermediate that temperature at which they were discharged from valve 10 53 into line 54 and ambient temperature. This heating is accomplished within heat exchanger 55 using a 15 compressed vapor slip stream drawn off line 47 through line 56 as a heat source. If it is desirable to have the two streams of carbon dioxide condensate leaving heat exchanger 48 through line 60 and leaving 20 heat exchanger 55 through line 61 at or near the extraction temperature, e.g. substantially room temperature, one may include some refrigeration means such as heat exchanger 59 in line 60 in accordance with well established engineering practice.

25 The product ethanol and cosolvent along with any carbon dioxide vapor at the reduced pressure, e.g. about 3 atmospheres, are carried by line 62 from

- 29 -

exchanger 55 into flash vessel 63. The latter serves as a separator from which the carbon dioxide vapor is taken off through line 64 into vapor holding tank 30. The liquid mixture bottoms of product and cosolvent in flash tank 63 must be separated and Fig. 2 illustrates the use of still 65 to accomplish this. The liquid bottoms are first heated to their boiling point in heat exchanger 66 through indirect heat exchange with a heat transfer fluid, e.g. oil taken from a supply tank 67 delivered by a suitable pump 68 through heater 69 by suitable conduit 70 to heat exchanger 66. The heat transfer fluid discharged from heat exchanger 66 is then returned to supply tank 67 through line 71. It will be appreciated that the means shown for heating the liquid bottoms discharged from separator 62 are in actuality represented by simplified illustrations and that many suitable arrangements of heating means for raising the temperature of the bottoms to that required for introduction into still 65 through line 72 are within the skill of the art.

The top section of still 65 is equipped in a well known manner with partial reflux condenser coils (not detailed in the drawing); the center section has a feed dispenser and packing of well-known design to provide contact area between the ethanol vapor upflow and the cosolvent liquid downflow in the distillation column (not detailed in the drawing); and the bottom

- 30 -

reboiler section 73 houses reboiler coils 74. Heat is supplied to the reboiler liquid by circulating a heat transfer fluid by pump 67 from fluid supply tank 67 through line 76 and heater 77 through coils 74 and returning it by line 78 to supply tank 67.

The bottoms in still reboiler section 73 are the higher-boiling cosolvent and they are drawn off at a rate to maintain a liquid-vapor interface just above the still coils. This cosolvent is taken by line 79 through condenser 80 into cosolvent storage tank 81 from where it is recycled through line 82 to cosolvent feed tank 15. The latter may, if desired, be combined with tank 81 into a single cosolvent holding tank. If necessary, makeup cosolvent may be introduced from makeup supply tank 83 into line 82.

The lower-boiling point organic liquid product vapor is withdrawn from the top of still 65 through line 85 by way of condenser 86 into product solute tank 87.

The combined carbon dioxide vapor in holding tank 30 must be converted to a solvent condition -- preferably near or above its critical pressure of 72.8 atmospheres so that it may be used at temperatures below its critical temperature of 31.1°C. The vapor is therefore taken through line 90 to compressor 91 which is preferably a two-stage compressor with inter-cooling. Compressor 91 may be mechanically connected

- 31 -

to turbine 50 (by means not shown) and driven by it. The heat of compression is subsequently removed from the compressed carbon dioxide in one or more after-coolers 92 and 93 prior to being carried by line 94 into liquid carbon dioxide return line 60 which becomes carbon dioxide feed line 13. Any necessary pressurized makeup solvent-condition carbon dioxide is brought into feed line 13 from makeup supply 95; and any required adjustment in carbon dioxide feed temperature is accomplished in heat exchanger 96.

In the conventional distillation of azeotrope-forming mixtures, the resulting product solute may require additional azeotropic distillation in those cases in which the product is leaner in solute than the azeotropic composition. In the process of this invention, however, the fluid solvent and process conditions may be chosen to provide a product solute which is richer in solute than the corresponding azeotrope composition, thereby making it possible to eliminate the more difficult and energy-consuming azeotropic distillation step and to substitute conventional distillation for it. Therefore, in some cases where sufficient solvent remains in the organic liquid solute product, it may be desirable to subject the product liquid withdrawn through line 85 to a final distillation step in conventional distillation apparatus (not shown). Such an optional final distillation

- 32 -

step will, of course, require far less energy than would be required to effect the separation of the liquid organic solute and solvent solely by conventional distillation followed by any necessary azeotropic distillation.

5 The individual apparatus components are either presently available or can be readily designed and constructed using available information concerning materials and performance of related available com-
10 ponents. In the case of some of the components it may be found desirable to use specific embodiments or modifications of known equipment to achieve an optimum design balance in the overall system. Thus, for example, it may be desirable to use a pulsed extraction
15 column to ensure that the small droplets making up the discontinuous phase are efficiently suspended throughout the continuous liquid during contacting and extracting.

The addition of a cosolvent to liquid carbon
20 dioxide extractant is illustrated in Figs. 4 and 5. The cosolvent used was 2-ethyl hexanol. The fluids in the extractor 12 (Fig. 2) during extraction were maintained between about 15 and 25°C and between about 80 and 82 atmospheres. In carbon dioxide recovery still
25 40 the temperature was maintained between about 10 and 25°C, and pressure between about 35 and 50 atmospheres. The cosolvent/product separation still

- 33 -

65 was kept at between about 1.5 atmospheres and at a temperature between about 80 and 170°C.

5 A number of runs were made in a pilot plant constructed as a manifestation based upon Fig. 2, and having sampling and analyzing means incorporated in appropriate locations within the plant. Aqueous solu-
10 tions having ethanol concentrations varying from as little as 0.05 weight percent of ethanol to 10+ percent were used as feeds. Solvent-to-feed ratios were varied from 1 to 10, and feed rates of the aqueous
15 solution were between $\frac{1}{2}$ and 5 pounds per minute. The amount of cosolvent used was varied from zero up to about 30 weight percent based on carbon dioxide weight.

15 The change in the extractor performance due to the addition of the cosolvent was monitored by measuring the change in ethanol concentrations in the raffinate. The results are plotted in Fig. 4 which
20 shows that the degree of extraction is directly proportional to the cosolvent concentration in the liquid carbon dioxide extractant for a given solvent-to-feed ratio. This linear relationship extends into dilute
25 systems which means that suitable cosolvents will work equally well throughout a commercial extraction column.

A quantitative measure of the extractor performance is the stage efficiency. This is calculated

- 34 -

from an estimate of the number of theoretical stages required for a given separation and the actual number of stages. The theoretical number of stages is computed using a McCabe-Thiele diagram. Equilibrium data
5 are needed for alcohol/water/carbon dioxide/cosolvent systems, and therefore a numerical approximation of the McCabe-Thiele method was chosen.

The known Kremser-Brown-Souders equation was used to calculate the number of theoretical stages for the
10 extraction process before the cosolvent addition. An assumption was made that adding cosolvent to the extractor would not change the number of theoretical stages as long as all other operating conditions remain unchanged. This assumption allowed a new
15 distribution coefficient (D.C.) of ethanol in the presence of cosolvent to be calculated. The change in the D.C. was found to increase by as much as a factor of 20 as shown in Fig. 5. This change signifies that cosolvents significantly enhance the solvent's
20 stripping action and thus the extraction process.

Using the apparatus and process of the present invention, it has been found that for the extraction of ethanol in a CO₂/cosolvent/water/ethanol system, a desirable cosolvent to be added is 2-ethyl hexanol
25 (typically 2.9% of total volume for a concentration of about 9% ethanol in the feed). This latter cosolvent in the proportion indicated provides a DC of from 0.2

-35-

to 0.4. This result can be compared with the DCs achieved in comparison with other cosolvents or no cosolvent at all, as shown in the following table where Wt% is the weight percent of ethanol in the feed and DC, of course, is the distribution coefficient

TABLE I

		Wt. %	DC
10	No cosolvent	10	0.03-0.06
	hexanol	10	0.1
	2-ethyl hexanediol	13	0.01-0.07
	n-Amyl alcohol	11	0.12
	tert. amyl alcohol	9	0.1
15	n-butanol	9	0.07

Similarly for the extraction of acetic acid from a CO₂/cosolvent/water/acid system, hexanoic acid is a preferred cosolvent because it exhibits a DC of 0.387 for a feed concentration of 10% acetic acid, as compared to other or no solvents as shown in the following table.

TABLE II

	Wt. %	DC
No cosolvent	10.7	0.164
n-amyl alcohol	9.4	0.281
2-ethyl hexanol	8.7	0.265

- 36 -

5 The addition of cosolvents in extracting an organic liquid from an aqueous solution using as a fluid extractant a pressurized gas can decrease the overall capital and operating costs of an extraction system, decrease the solvent-to-feed ratio required to perform a given amount of solute stripping, and permits decreasing the extractor diameter, reboiler surface area, compressor capacity and power consumption.

10 It will thus be seen that the objects set forth above, among those made apparent from the preceding description, are efficiently attained and, since certain changes may be made in carrying out the above process and in the constructions set forth without departing from the scope of the invention, it is
15 intended that all matter contained in the above description or shown in the accompanying drawings shall be interpreted as illustrative and not in a limiting sense.

- 37 -

WE CLAIM:

1 1. A fluid extractant for extracting an organic
2 solute from an aqueous solution, said extractant
3 comprising a mixture of liquid carbon dioxide and an
4 monofunctional hydrocarbon cosolvent, which cosolvent
5 is a liquid at about 60°C and standard pressure; is
6 a substantially better solvent for the liquid solute
7 than for the water; has a solubility in liquid carbon
8 dioxide greater than 1 weight percent that under the
9 conditions of extraction and separation, the carbon
10 dioxide/cosolvent mixture forms a single phase; in
11 the absence of solute, has a distribution coefficient
12 (carbon dioxide/water) of greater than 3 on a weight
13 basis; has a boiling point substantially above or
14 below that of the liquid solute at atmospheric
15 pressure; and is substantially chemically unreactive
16 under process conditions with the first solvent fluid,
17 the liquid solute and water.

- 38 -

1 2. A fluid extractant in accordance with claim 1
2 wherein said cosolvent is selected from the group
3 consisting of 2-ethyl hexanol, n-butanol, n-amyl alco-
4 hol, t-amyl alcohol, 2-ethyl hexanol, dodecyl alcohol,
5 decyl alcohol, hexanoic acid, octanoic acid, decanoic
6 acid, pentanoic acid, heptanoic acid, furfural, tri-
7 octylamine, isopropylamine, trioctylphosphine oxide,
8 and mixtures thereof.

1 3. A fluid extractant in accordance with claim 1
2 wherein said organic liquid solute is ethanol and said
3 cosolvent is 2-ethyl hexanol.

1 4. A fluid extractant in accordance with claim 1
2 wherein said organic liquid solute is acetic acid and
3 said cosolvent is hexanoic acid.

1 5. A fluid extractant in accordance with claim 1
2 wherein the temperature of said liquid carbon dioxide
3 is below its critical temperature and is at a pressure
4 sufficient to maintain it in the liquid state.

1 6. A fluid extractant in accordance with claim 5
2 wherein the temperature of said liquid carbon dioxide
3 ranges between about 15° and about 30°C; and the
4 pressure ranges between about 40 and about 85
5 atmospheres.

- 39 -

1 7. A process for separating an oxygenated hydro-
2 carbon solute from an aqueous liquid mixture, said
3 process being characterized by the steps of

4 (a) contacting at an elevated pressure said
5 liquid mixture with a fluid extractant comprising a
6 first solvent fluid and a cosolvent thereby to form
7 two phases, the first phase comprising an extract of
8 said solute in said fluid extractant and the second
9 phase comprising water with residual cosolvent and
10 organic solute;

11 (b) contacting said second phase with additional
12 first solvent fluid to remove said residual cosolvent
13 therefrom and transfer it to said first phase; and

14 (c) separating said first and second phases; said
15 first solvent fluid being a gas under ordinary ambient
16 conditions of temperature and pressure as to render it
17 a fluid which is substantially more solvent for said
18 solute than for the water of said mixture;

19 said cosolvent being a monofunctional
20 hydrocarbon that is a liquid at about 60°C and
21 standard pressure; is a substantially better solvent
22 for the liquid solute than for the water; has a solu-
23 bility in carbon dioxide greater than 1 weight percent
24 so that under the conditions of extraction and separa-
25 tion, the carbon dioxide/cosolvent mixture forms a
26 single phase; in the absence of solute, has a distri-
27 bution coefficient (carbon dioxide/water) of greater
28 than 3 on a weight basis; has a boiling point substan-

- 40 -

29 tially above or below that of the liquid solute at
30 atmospheric pressure; and is substantially chemically
31 unreactive under process conditions with the first
32 solvent fluid, the liquid solute and water.

1 8. A process in accordance with claim 7 wherein
2 said first solvent fluid is carbon dioxide.

1 9. A process in accordance with claim 8 wherein
2 said carbon dioxide is at a temperature below its cri-
3 tical temperature and is at a pressure sufficient to
4 maintain it in the liquid state.

1 10. A process in accordance with claim 7 wherein
2 said oxygenated hydrocarbon liquid solute is a mono-
3 hydric alcohol, monoacid, ketone, aldehyde, ether or
4 ester.

1 11. A process in accordance with claim 7 wherein
2 said oxygenated hydrocarbon liquid solute is ethanol,
3 said first solvent fluid is liquid carbon dioxide and
4 said cosolvent is 2-ethyl hexanol.

1 12. A process in accordance with claim 7 wherein
2 said oxygenated hydrocarbon solute is acetic acid,
3 said first solvent fluid is liquid carbon dioxide and
4 said cosolvent is hexanoic acid.

- 41 -

1 13. In a process for separating an oxygenated
2 hydrocarbon liquid solute from an aqueous liquid mix-
3 ture, in which process the mixture is contacted with
4 an extractant fluid comprising a first solvent fluid
5 which is a gas under ordinary ambient conditions of
6 temperature and pressure but which is under such con-
7 ditions of temperature and pressure as to render it a
8 fluid which is substantially more solvent for said
9 solute than for the water of said mixture, the impro-
10 vement wherein

11 said extractant fluid also comprises a cosolvent
12 which is a liquid at about 60°C and standard pressure;
13 is a substantially better solvent for the liquid
14 solute than for the water; has a solubility in liquid
15 carbon dioxide greater than 1 weight percent so that
16 under the conditions of extraction and separation, the
17 carbon dioxide/cosolvent mixture forms a single phase;
18 has a distribution coefficient (carbon dioxide/water)
19 in the absence of solute, of greater than 3 on a
20 weight basis; has a boiling point substantially above
21 or below that of the liquid solute at atmospheric
22 pressure; and is substantially chemically unreactive
23 under process conditions with the first solvent fluid,
24 the liquid solute and water; and

25 said improvement further comprises the steps of:
26 forming a fluid extract of said liquid solute in
27 said extractant fluid, and a raffinate comprising
28 substantially water;

- 42 -

29 separating said fluid extract and said raffinate;
30 distilling said fluid extract to separate same
31 into a still overhead fraction comprising substan-
32 tially said first solvent fluid, and a bottoms frac-
33 tion comprising substantially said cosolvent and said
34 liquid solute; and
35 distilling said bottoms fraction to separate same
36 into said liquid solute and said cosolvent.

1 14. A process in accordance with claim 13
2 wherein said first solvent fluid is carbon dioxide.

1 15. A process in accordance with claim 14
2 wherein said carbon dioxide is liquid at a temperature
3 below its critical temperature and at a pressure suf-
4 ficient to maintain it in the liquid state.

1 16. A process in accordance with claim 13
2 wherein said oxygenated hydrocarbon liquid solute is a
3 monohydric alcohol, monoacid, ketone, aldehyde, ether
4 or ester.

1 17. A process in accordance with claim 13 wherein
2 said oxygenated hydrocarbon liquid solute is ethanol,
3 said first solvent fluid is liquid carbon dioxide and
4 said cosolvent is 2-ethyl hexanol.

- 43 -

1 18. A process in accordance with claim 13
2 wherein said oxygenated hydrocarbon liquid solute is
3 acetic acid, said first solvent fluid is liquid carbon
4 dioxide and said cosolvent is hexanoic acid.

1 19. A process in accordance with claim 13 in
2 which said step of forming a fluid extract of said
3 liquid solute comprises the steps of contacting said
4 aqueous liquid mixture with said extractant fluid to
5 form said fluid extract and said raffinate and
6 further contacting said raffinate with an additional
7 quantity of said first fluid solvent to remove any of
8 said cosolvent therefrom for addition to said fluid
9 extract.

- 44 -

1 20. A process for separating an oxygenated
2 hydrocarbon liquid solute from a mixture of said
3 solute and water, said process comprising the steps of

4 (a) contacting said mixture with an extractant
5 fluid under conditions of temperature and pressure to
6 render said extractant fluid a solvent for said orga-
7 nic liquid solute but substantially less for water,
8 thereby forming a fluid extract of said liquid solute
9 in said extractant fluid and a preliminary raffinate,
10 said extractant comprising

11 (1) a first solvent fluid which is a gas
12 under ordinary ambient conditions of temperature
13 and pressure but which is under such conditions
14 of temperature and pressure as to render it a
15 fluid which is substantially more solvent for
16 said solute than for the water of said mixture,
17 and

18 (2) a cosolvent which is a mono-
19 functionally substituted hydrocarbon that is a
20 liquid at standard temperature and pressure; is
21 a substantially better solvent for the liquid
22 solute than for the water; has a solubility in
23 liquid carbon dioxide greater than 1 weight per-
24 cent so that under the conditions of extraction
25 and separation, the carbon dioxide/cosolvent mix-
26 ture forms a single phase; has a distribution
27 coefficient (carbon dioxide/water) in the absence
28 of solute, of greater than 3 on a weight basis;

- 45 -

29 has a boiling point substantially above or below
30 that of the liquid solute at atmospheric
31 pressure; and is substantially chemically unreactive under process conditions with the first
32 solvent fluid, the liquid solute and water;
33 (b) contacting said preliminary raffinate under
34 the conditions obtaining during said contacting step
35 (a) with additional first solvent to remove cosolvent
36 from said preliminary raffinate to form a final raffinate and to add said cosolvent thus removed to said
37 fluid extract;
38 (c) separating said fluid extract and said final
39 raffinate;
40 (d) providing said fluid extract as a first
41 still feed separable into two phases by distillation;
42 (e) distilling said first still feed to produce
43 a first still overhead vapor of said first solvent
44 fluid and liquid still bottoms comprising said
45 cosolvent and said liquid solute;
46 (f) flashing said still bottoms to form a second
47 still feed;
48 (g) distilling said second still feed to
49 separate said cosolvent for recycling and said liquid
50 solute as product; and
51 (h) adjusting the temperature and pressure of
52 said first still overhead vapor of said first solvent
53 fluid before mixing it with said cosolvent to form
54 said extract fluid.
55
56

- 46 -

1 21. A process in accordance with claim 20
2 wherein said step of adjusting said temperature and
3 pressure of said first still overhead vapor comprises
4 compressing said vapor to provide compressed vapor at
5 an elevated temperature and effecting indirect heat
6 exchange between said compressed vapor and said liquid
7 still bottoms to provide thermal energy required in
8 step (e), and to form a liquid condensate of said
9 vapor.

1 22. A process in accordance with claim 20
2 wherein said first solvent fluid is carbon dioxide.

1 23. A process in accordance with claim 22
2 wherein said carbon dioxide is liquid at a temperature
3 below its critical temperature and at a pressure suf-
4 ficient to maintain it in the liquid state.

1 24. A process in accordance with claim 20
2 wherein said oxygenated hydrocarbon liquid solute is a
3 monohydric alcohol, monoacid, ketone, aldehyde or
4 ester.

- 47 -

1 25. A process for separating an oxygenated
2 hydrocarbon liquid solute from an aqueous mixture,
3 said process comprising the steps of
4 (a) contacting said mixture with an extractant
5 fluid comprising liquid carbon dioxide and a
6 cosolvent, wherein said cosolvent is a liquid at about
7 60°C and standard pressure; is a monofunctionally
8 substituted hydrocarbon; is a substantially
9 better solvent for the liquid solute than for
10 the water; has a solubility in the liquid carbon
11 dioxide greater than 1 weight percent so that
12 under the conditions of extraction and separation, the
13 carbon dioxide/cosolvent mixture forms a single phase;
14 has a distribution coefficient (carbon dioxide/water)
15 in the absence of solute, of greater than 3 on a
16 weight basis; has a boiling point substantially above
17 or below that of the liquid solute at atmospheric
18 pressure; and is substantially chemically unreactive
19 under process conditions with the liquid carbon
20 dioxide, the liquid solute and water;
21 said contacting being carried out at a pressure
22 above about 75 atmospheres and a temperature below the
23 critical temperature of carbon dioxide, thereby
24 forming a fluid extract of said solute and a prelimi-
25 nary raffinate comprising water with minor amounts of
26 said carbon dioxide and said cosolvent;
27 (b) contacting said preliminary raffinate under
28 the conditions obtaining in step (a) with liquid car-

- 48 -

29 bon dioxide to remove cosolvent from said preliminary
30 raffinate to form a final raffinate and to add said
31 cosolvent thus removed to said fluid extract of said
32 solute and said extractant fluid;

33 (c) separating said fluid extractant from said
34 final raffinate;

35 (d) reducing the pressure of said fluid extract
36 to form a first still feed separable into two phases
37 by distillation;

38 (e) distilling said first still feed to produce
39 a first still overhead comprising essentially all car-
40 bon dioxide vapor and first still bottoms comprising
41 said solute and said cosolvent;

42 (f) recompressing said carbon dioxide vapor from
43 step (e) to provide recompressed carbon dioxide at a
44 pressure essentially equivalent to that of said carbon
45 dioxide used in step (a) and at a temperature above
46 the boiling point of said still bottoms;

47 (g) effecting indirect heat exchange between
48 said recompressed carbon dioxide and said first still
49 bottoms to provide thermal energy required in said
50 distilling step (e) and to form a carbon dioxide
51 liquid condensate;

52 (h) flashing said liquid still bottoms by
53 further reducing their pressure to remove residual
54 carbon dioxide as vapor flash and to form a second
55 still feed;

56 (i) heating said second still feed to the

- 49 -

57 boiling point and distilling it to separate said
58 cosolvent and said liquid solute as product;
59 (j) adjusting, if necessary, the temperature of
60 said carbon dioxide liquid condensate; and
61 (k) mixing the recovered cosolvent from step (i)
62 and said carbon dioxide from step (g) for recycling in
63 the process.

1 26. A process in accordance with claim 25
2 including the steps of
3 (l) reducing the pressure of said final raf-
4 finate to a level intermediate between that of said
5 contacting step and atmospheric and separating the
6 resulting carbon dioxide vapor flash from the final
7 liquid raffinate;
8 (m) combining said carbon dioxide vapor flashes
9 from steps (h) and (l);
10 (n) adjusting the pressure and temperature of
11 the combined vapor flashes of step (m) and adding the
12 resulting liquid carbon dioxide to said liquid carbon
13 dioxide of step (g).

- 50 -

1 27. Apparatus for separating an organic liquid
2 solute from an organic liquid solute water mixture,
3 said apparatus comprising in combination

4 (a) pressure vessel means for effecting counter-
5 current contact between (1) a mixture of an organic
6 liquid solute and water and (2) a pressurized extrac-
7 tant fluid comprising a mixture of a pressurized fluid
8 and a liquid cosolvent, said mixture being a solvent
9 for said organic liquid solute but substantially less
10 for said water, to produce a fluid extract of said
11 organic liquid in said extractant fluid and a raf-
12 finite comprising water with minor amounts of said
13 first fluid;

14 (b) mixer means for mixing said first fluid and
15 said liquid cosolvent to form said extractant fluid;

16 (c) means for introducing said extractant fluid
17 into said pressure vessel means at a predetermined
18 level;

19 (d) means for introducing additional first fluid
20 below said predetermined level;

21 (e) first distillation vessel means for
22 separating a still feed into an overhead vapor and
23 first liquid bottoms having associated therewith
24 reboiler means including heat exchange means for cir-
25 culating a heat transfer fluid therethrough in
26 indirect heat exchange relationship with said first
27 liquid bottoms;

28 (f) first pressure line means connected for

- 51 -

29 conveying said fluid extract as a still feed from said
30 pressure vessel means to said first distillation
31 vessel means;
32 (g) vapor compressor means;
33 (h) second pressure line means incorporating
34 said vapor compressor means and connected for con-
35 veying said overhead vapor to said vapor compressor
36 means and recompressed vapor therefrom through said
37 heat exchange means;
38 (i) third pressure line means for recycling said
39 recompressed vapor from said heat exchange means to
40 said mixer means and to said means to introduce
41 pressurized first fluid below said predetermined level;
42 (j) still bottom pressure reducing means;
43 (k) flash tank means;
44 (l) fourth pressure line means incorporating
45 said still bottom pressure reducing means and con-
46 nected for conveying said still bottoms from said
47 reboiler means to said flash tank means through said
48 still bottom pressure reducing means to provide a mix-
49 ture of said liquid solute and said cosolvent;
50 (m) second distillation vessel means for
51 separating said liquid solute as product and said
52 cosolvent by distillation;
53 (n) liquid line means incorporating heating
54 means and connected for conveying said mixture of said
55 liquid solute and said cosolvent from said flash tank
56 means to said second distillation vessel means; and

- 52 -

57 (o) means for returning said cosolvent from said
58 second distillation vessel means to said mixer means.

1 28. An apparatus in accordance with claim 27
2 comprising
3 (p) raffinate separating means for providing a
4 vapor flash of said first fluid;
5 (q) vapor flash collection means;
6 (r) means connected for conveying first fluid
7 vapor from said raffinate separating means and from
8 said flash tank means to said vapor flash collection
9 means;
10 (s) means for adjusting the temperature and
11 pressure of said vapor from said vapor flash collec-
12 tion means to that in said third pressure line means;
13 and
14 (t) means for introducing the resulting
15 temperature/pressure-adjusted fluid into said third
16 pressure line means.

1 29. An apparatus in accordance with claim 27
2 including fluid extract pressure reducing means asso-
3 ciated with said first pressure line means.

- 53 -

1 30. An apparatus in accordance with claim 29
2 including coalesced liquid decanting means associated
3 with said first pressure line means and downstream
4 from said pressure reducing means.

1 31. An apparatus in accordance with claim 29
2 wherein said fluid extract pressure reducing means
3 comprises energy generating means.

1 32. An apparatus in accordance with claim 31
2 wherein said energy generating means are mechanically
3 linked to said vapor compressor means to provide power
4 thereto.

1 33. An apparatus in accordance with claim 27
2 including fifth pressure line means connecting said
3 second and third pressure line means and having
4 supplemental heat exchange means arranged for
5 effecting heat exchange between a slip stream of said
6 recompressed vapor and said still bottoms.

- 54 -

1 34. An apparatus in accordance with claim 27
2 wherein said second distillation vessel means incor-
3 porates reboiler means and includes heat exchange
4 means associated with said reboiler means arranged for
5 heating said cosolvent forming said still bottoms of
6 said second distillation vessel means.

1 35. An apparatus in accordance with claim 27
2 including condenser means arranged for separately
3 cooling and condensing said liquid solute product and
4 said cosolvent from said second distillation vessel
5 means.

1/5

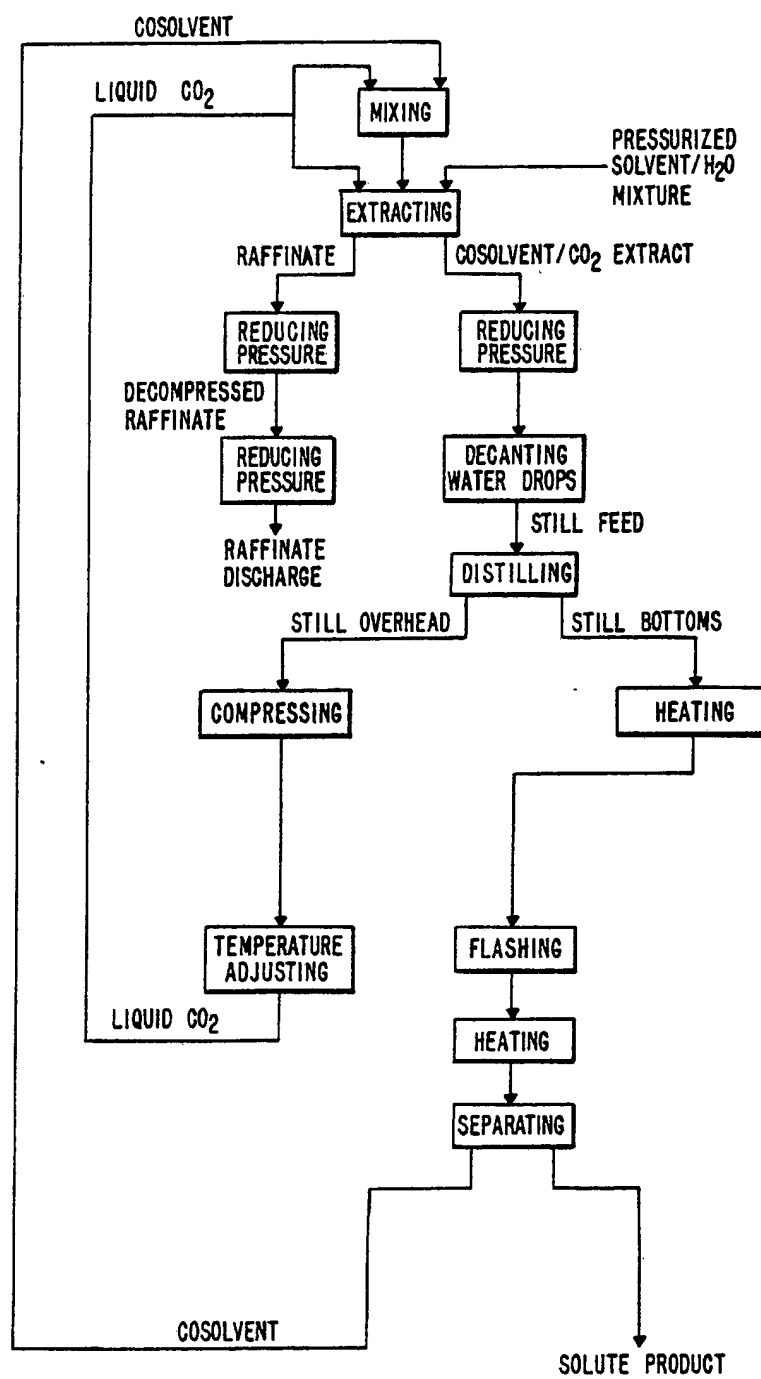


FIG. 1

2 / 5

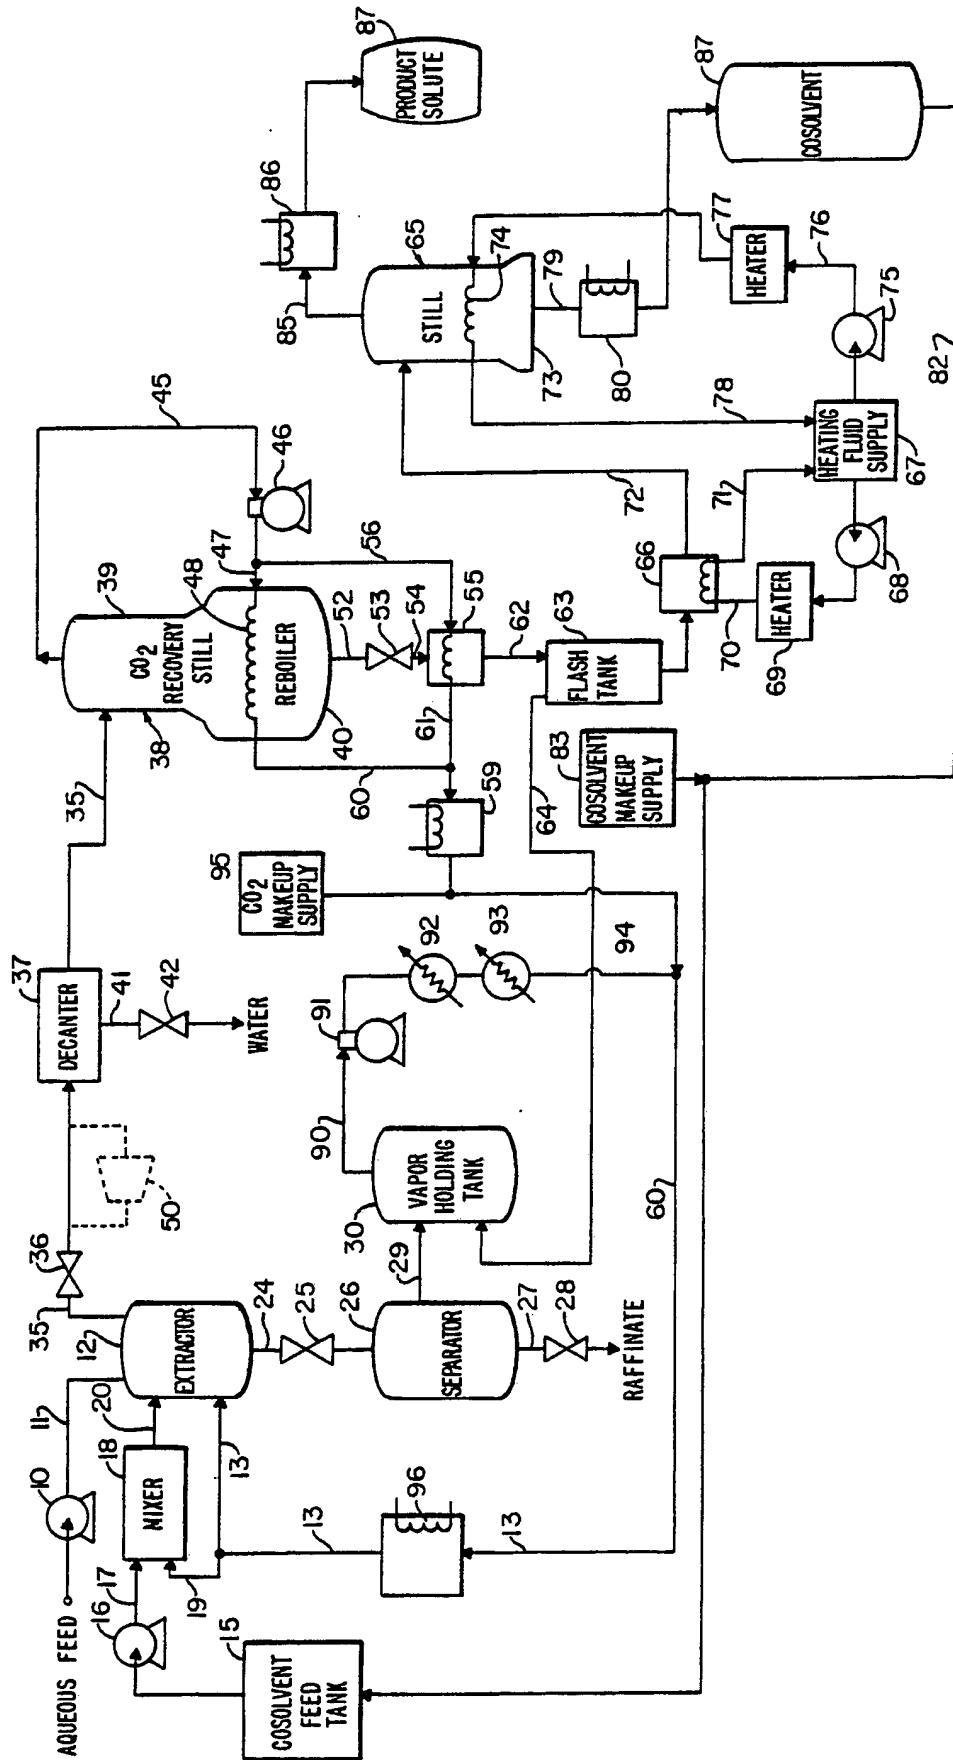
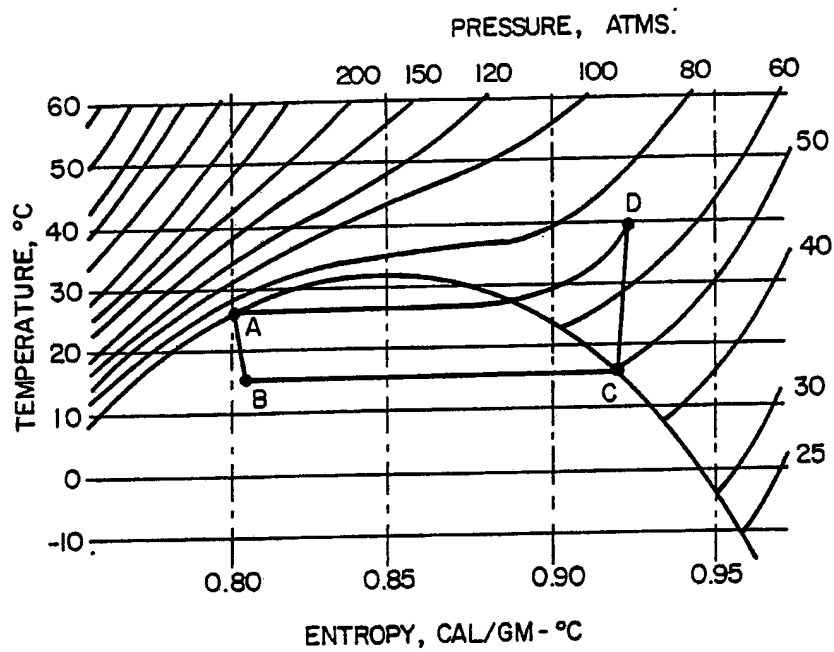


FIG. 2

3 / 5

APPROXIMATE CO₂ STATE CONDITIONS

- A- IN EXTRACTION COLUMN
- B- FEED TO STILL
- C- OVERHEAD FROM STILL
- D- COMPRESSOR DISCHARGE

FIG. 3

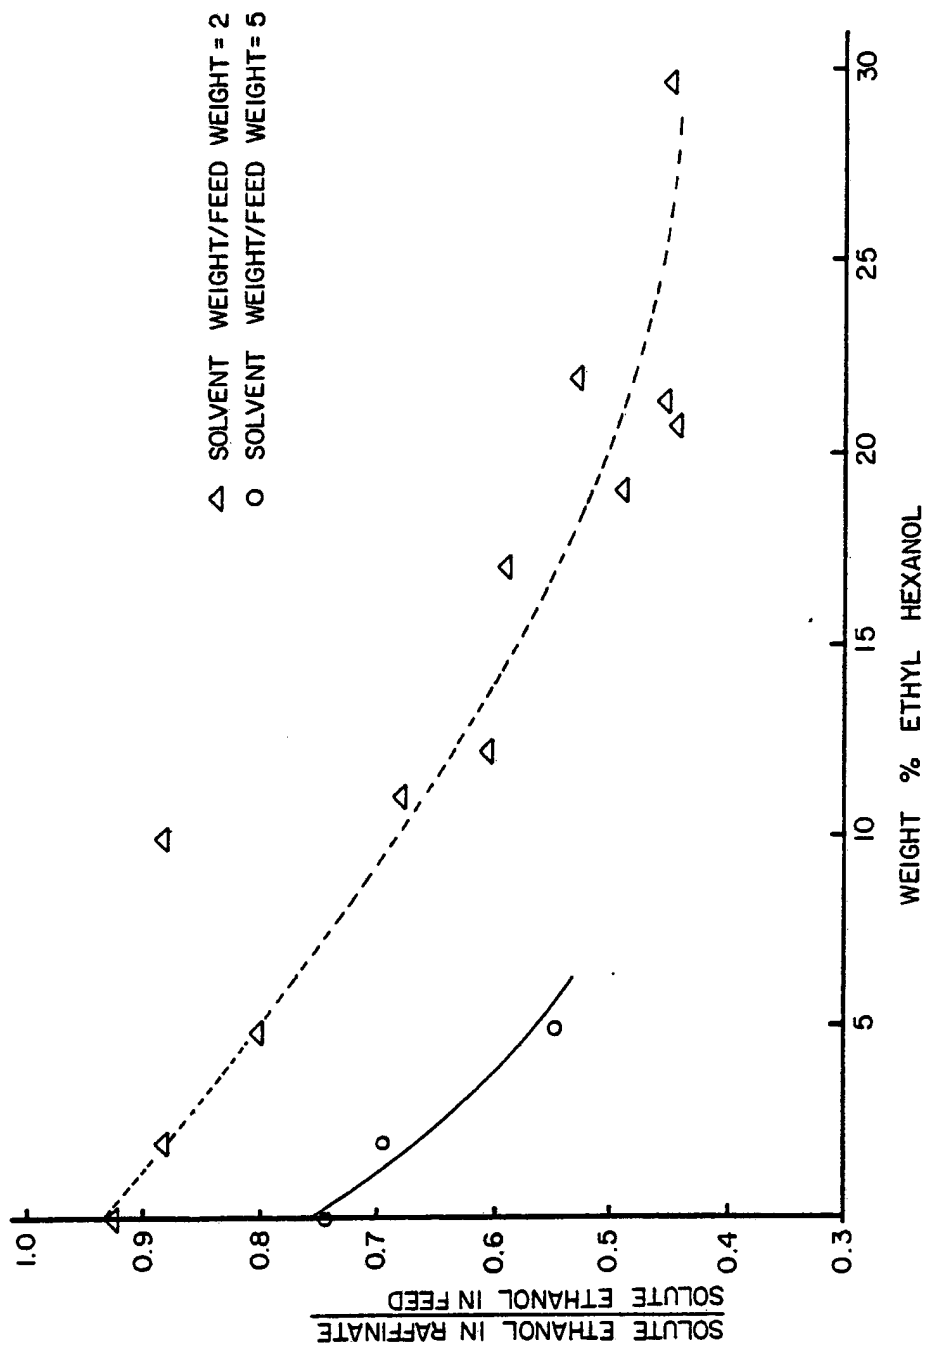


FIG. 4

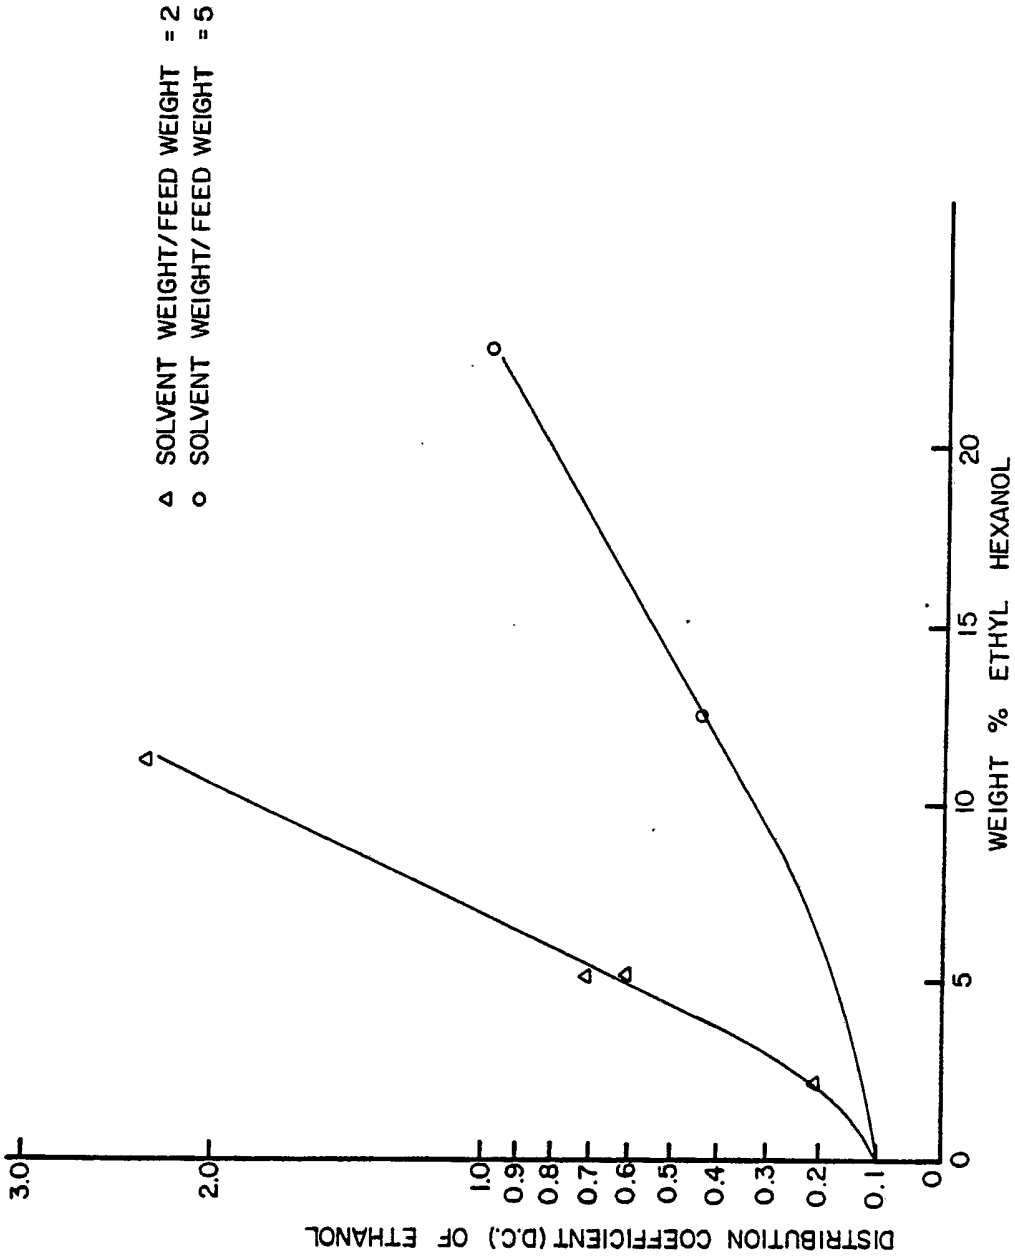


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No PCT/US85/00671

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ³ According to International Patent Classification (IPC) or to both National Classification and IPC <div style="text-align: center; margin-top: 5px;"> INT. CL. 3B01D 11/04 U.S. CL. 210/634 </div>																	
II. FIELDS SEARCHED <div style="text-align: center; margin-top: 5px;">Minimum Documentation Searched ⁴</div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <th style="width: 20%;">Classification System</th> <th style="width: 40%;">Classification Symbols</th> <th style="width: 40%;"></th> </tr> <tr> <td style="text-align: center; vertical-align: top;">US</td> <td style="vertical-align: top;">203/16, 19 210/634 562/608</td> <td style="text-align: center; vertical-align: top;">568/913</td> </tr> </table> <div style="text-align: center; margin-top: 5px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵</div>			Classification System	Classification Symbols		US	203/16, 19 210/634 562/608	568/913									
Classification System	Classification Symbols																
US	203/16, 19 210/634 562/608	568/913															
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴ <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <th style="width: 10%;">Category [*]</th> <th style="width: 60%;">Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷</th> <th style="width: 30%;">Relevant to Claim No. ¹⁸</th> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">US,A, 4,349,415, PUBLISHED 14 SEPTEMBER 1982, DEFILIPPI ET AL.</td> <td style="text-align: center; vertical-align: top;">1-35</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">US,A, 4,353,784, PUBLISHED 12 OCTOBER 1982, KOGA ET AL.</td> <td style="text-align: center; vertical-align: top;">1-35</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">Y</td> <td style="vertical-align: top;">US,A, 4,401,514, PUBLISHED 30 AUGUST 1983, KANZLER, ET AL.</td> <td style="text-align: center; vertical-align: top;">1-35</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">P Y</td> <td style="vertical-align: top;">US,A, 4,455,198, PUBLISHED 19 JUNE 1984, ZUDKEVITCH ET AL.</td> <td style="text-align: center; vertical-align: top;">1-35</td> </tr> </table>			Category [*]	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸	Y	US,A, 4,349,415, PUBLISHED 14 SEPTEMBER 1982, DEFILIPPI ET AL.	1-35	Y	US,A, 4,353,784, PUBLISHED 12 OCTOBER 1982, KOGA ET AL.	1-35	Y	US,A, 4,401,514, PUBLISHED 30 AUGUST 1983, KANZLER, ET AL.	1-35	P Y	US,A, 4,455,198, PUBLISHED 19 JUNE 1984, ZUDKEVITCH ET AL.	1-35
Category [*]	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸															
Y	US,A, 4,349,415, PUBLISHED 14 SEPTEMBER 1982, DEFILIPPI ET AL.	1-35															
Y	US,A, 4,353,784, PUBLISHED 12 OCTOBER 1982, KOGA ET AL.	1-35															
Y	US,A, 4,401,514, PUBLISHED 30 AUGUST 1983, KANZLER, ET AL.	1-35															
P Y	US,A, 4,455,198, PUBLISHED 19 JUNE 1984, ZUDKEVITCH ET AL.	1-35															
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>[*] Special categories of cited documents: ¹⁵</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>																	
IV. CERTIFICATION <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <td style="width: 50%; padding: 5px;"> Date of the Actual Completion of the International Search ³ <div style="text-align: center; font-weight: bold; margin-top: 5px;">9 MAY 1985</div> </td> <td style="width: 50%; padding: 5px;"> Date of Mailing of this International Search Report ³ <div style="text-align: center; font-weight: bold; margin-top: 5px;">20 MAY 1985</div> </td> </tr> <tr> <td style="width: 50%; padding: 5px;"> International Searching Authority ¹ <div style="text-align: center; font-weight: bold; margin-top: 5px;">ISA/US</div> </td> <td style="width: 50%; padding: 5px;"> Signature of Authorized Officer ¹⁰ <div style="text-align: center; margin-top: 5px;"> FRANK SPEAR </div> </td> </tr> </table>			Date of the Actual Completion of the International Search ³ <div style="text-align: center; font-weight: bold; margin-top: 5px;">9 MAY 1985</div>	Date of Mailing of this International Search Report ³ <div style="text-align: center; font-weight: bold; margin-top: 5px;">20 MAY 1985</div>	International Searching Authority ¹ <div style="text-align: center; font-weight: bold; margin-top: 5px;">ISA/US</div>	Signature of Authorized Officer ¹⁰ <div style="text-align: center; margin-top: 5px;"> FRANK SPEAR </div>											
Date of the Actual Completion of the International Search ³ <div style="text-align: center; font-weight: bold; margin-top: 5px;">9 MAY 1985</div>	Date of Mailing of this International Search Report ³ <div style="text-align: center; font-weight: bold; margin-top: 5px;">20 MAY 1985</div>																
International Searching Authority ¹ <div style="text-align: center; font-weight: bold; margin-top: 5px;">ISA/US</div>	Signature of Authorized Officer ¹⁰ <div style="text-align: center; margin-top: 5px;"> FRANK SPEAR </div>																